

Blocking Device



OUTLOCKS' Blocking Device may be used to block existing locking mechanisms of street cabinets, speed cameras, small safes and more.

Enhancing existing physical security level along with OUTLOCKS' access management and control.

The Blocking Device is concealed and is therefore pick resistant and vandal proof. An addition of SS801 Door Status Sensor installation kit for cabinets, allows monitoring of the door status as well as the blocking device - Locked and Closed or Open.

Applications:

Cabinets, speed and traffic cameras, vending machines, small safes.

Technical Specifications:

Case: Zamak Casting

Mechanism: Stainless Steel

Size: L=83.2mm (3.27"), H=18.2mm (0.72"), W=23.2mm (0.91")

Blocking Rod travel distance: 25mm

Operated By: OUTLOCKS' Control Unit

Package Content:

Form: Cardboard Box


1 x BD825 Unit

Related Products:

CU814 Control unit

SS801 Door Status Sensor installation kit

BD825

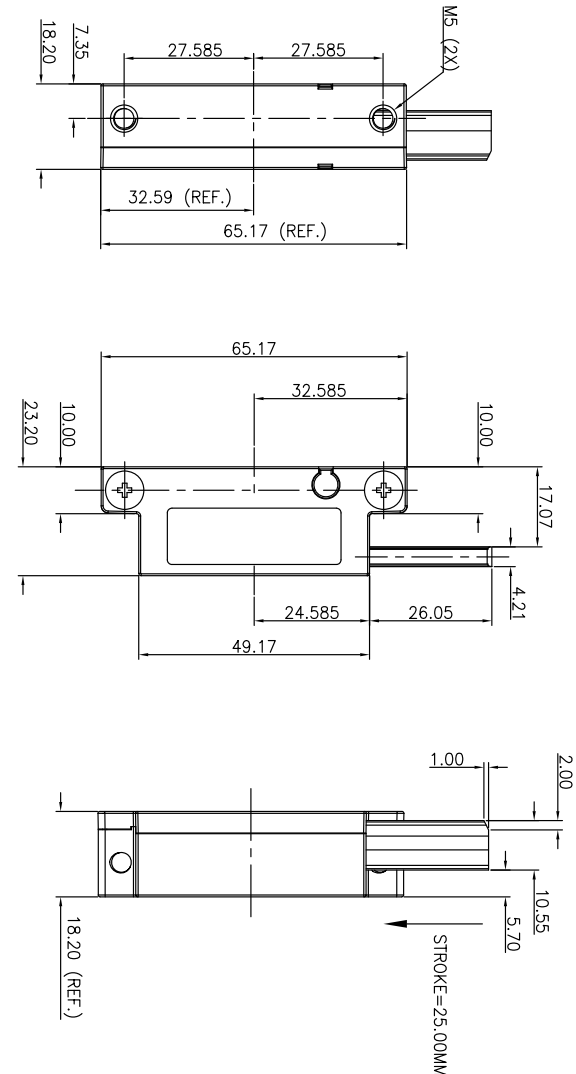

| Dimensions in mm